


DOUCET

HYDRAULIC STILES PRESS

Hydraulic Stiles Press is specifically designed to glue wood plank from 6" to 12" width. It is used more often for products such as door stile and rail or laminated beams, for example. The Hydraulic Stiles Press helps optimize efficiency using as little manpower as possible without sacrificing quality.

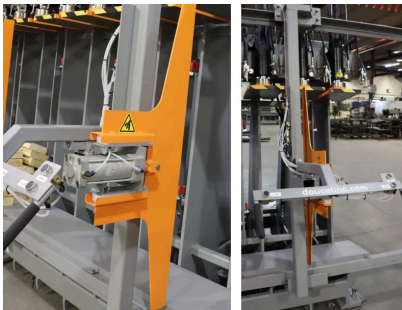

PNEUMATIC FLATTENER



ROTATING 4 SECTION HYDRAULIC STILES PRESS



3" HYDRAULIC CYLINDERS WITH INDIVIDUAL VALVE



CHARACTERISTICS & OPERATION

HYDRAULIC STILES PRESS INCLUDES:

- One 5 HP hydraulic unit with a variable flow pump to apply pressure.
- One, two or four sections, each section including:
 - 36" of opening;
 - Hydraulic cylinders of 3" diameter by 4" of stroke with a pusher plate.

OPTIONS & SPECIFICATIONS

THREE MODELS ARE AVAILABLE

- HYDRAULIC STILES PRESS WITH ONE SECTION
 - Fixed frame & One 5 HP hydraulic unit with a variable flow pump to apply pressure.
- HYDRAULIC STILES PRESS WITH TWO SECTIONS
 - The two sections are back to back;
 - One 5 HP hydraulic unit with a variable flow pump to apply pressure.
- HYDRAULIC STILES PRESS WITH FOUR SECTIONS
 - The four sections are mounted on a rotary frame 2 HP with a variable speed motor for rotation;
 - One 5 HP hydraulic unit with a variable flow pump to apply pressure;
 - Hydraulic motor for rotation with variable flow valve to adjust speed.

DOUCET

P. 1-866-673-8876
P. 1-819-367-2633
E. info@doucetinc.com
doucetinc.com

**DISCOVER OUR
RESOURCE CENTER**

- Articles
- Tutorials
- Videos
- Technical Support
- Tools

